



# SHEATHED THERMOCOUPLE WITH STANDARD MALE CONNECTOR Type TCG6

NT 50-07A

**Compliant with standards NFC 42321 ; NF EN 60584-1 ; IEC 584-1**

**Accessories**

- leakproof adjustable compression fitting
- fixed or adjustable bayonet-fitting fastening system
- rotating connector

TCGs marked  are not available

Type	TCG output	No. TCs	Sheath type	TC	Sheath diameter					
					1	1,5	2	3	4,5	6
<b>TCG6</b>	Standard male plug-in connector with compensated contacts  <input type="checkbox"/> <u>Extension option:</u> - standard female socket with compensated contacts and cable clamp - PVC extension cable, conductor cross-section 0.22 mm <sup>2</sup> , PVC insulation, internal copper braid and PVC sheath - withstands 105°C	Single	AISI 304L	T						
				J						
			Inconel 600	K						
				N						
			S							
			Nicrobell	N						
		PtRh10%	S							
		Duplex	AISI 304L	2T						
2J										
		Inconel 600	2K							





**Type TCG6**

TCG sheath

TC

d =  mm

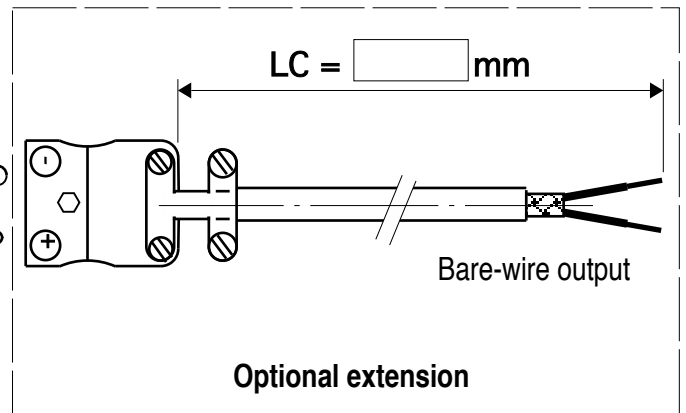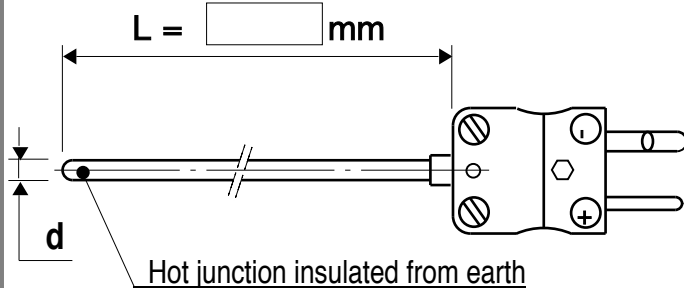

Option :

Earthed hot junction